

## I. CHARACTERISTICS

Made of recycled black rubber aggregate which has been sorted and graded, bound by volume-dyed polyurethane elastomer resin. As a result of the composition, expansion in heat and shrinking in the cold are quite normal. Other processed chemical elements are used in the composition of our HEXDALLE® XE TACTILE tiles to give them their solidity and elasticity.

Forms, designs and materials filed at the French National Institute for Intellectual Property (INPI)

## II. COLOURS

Brick red – Green – Black – Grey – Chocolate with possibility to fleck with beige (other colour, please contact us)

## III. MODELS


Hexdalle® Tactile R



Hexdalle® Tactile L



Hexdalle® Tactile D

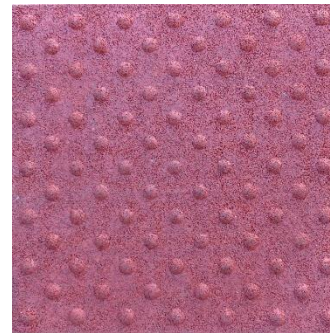

500 x 500 mm tile (Tolerance +/-0,5% at 20°C)


Thicknesses (without relief): 25 – 35 – 45 – 55 – 65 – 75 mm (Tolerance +/- 3% at 20°C)

Microporous tiles with water drainage system integrated under the tile to allow the water to evacuate.

**You can also insert our tactile tiles in wet pour floors.**

## IV. USE

HEXDALLE® XE TACTILE is an element entirely made of rubber that you can use in different ways: public gardens, retirement homes, leisure areas, facilities for handicapped people, etc...for outside. It can also stimulate the touch sense of patients with Alzheimer's disease.

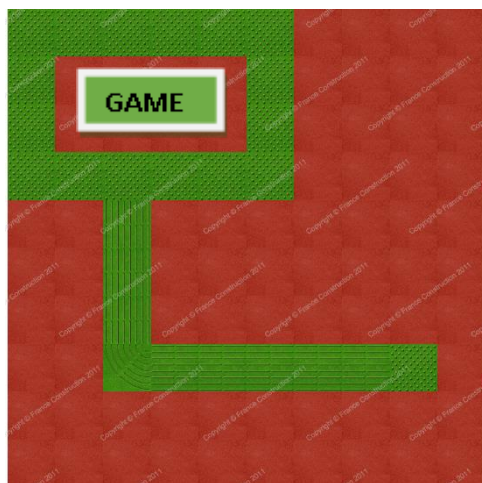

**HEXDALLE® XE TACTILE D** is a rubber flooring with domes on the surface => It alerts of the danger close to a child, i.e. a step, a bench, a tree, etc.

**HEXDALLE® XE TACTILE R** is a rubber flooring with bends on the relief surface => allows a partially-sighted person or a blind person to follow a path.

**HEXDALLE® XE TACTILE L** is a rubber flooring with straight lines on the relief surface => also allows a partially-sighted person or a blind person to follow a path.

## V. ADVANTAGES

To stay in good shape, you need to remain active. Encounters, outings, games are as many opportunities to stay in shape mentally as well as physically. Handicapped people or people with a disease do not have to give up all their leisure activities. Thanks to the HEXDALLE® XE TACTILE tiles, safely rediscover your sense of touch on a walking path! Our tiles' composition as well as their relief surface allow to create stimuli and test your sensations or indicate the presence of a stairway or an obstacle.

HEXDALLE® XE TACTILE rubber tiles absorb shocks and thus improve safety by reducing the risk of injury:

Non-slip, Interchangeable, microporous, water drainage underneath the tiles, rounded edges, weather resistant.

## VI. ASPECT IN SURFACE

The item has a granular aspect with relief on the surface.

## VII. SAFETY INSTRUCTIONS

People using this material must clearly be accompanied by a person to help them.

Forbidden site: too sloping ground

Type of ground: it must be flat or with a 1 to 3% slope

Clearance: there should be no obstacle less than 2 meters above the equipment (tree branches, etc.)

## VIII. CLEANING/MAINTENANCE

HEXDALLE® TACTILE tiles are designed to keep maintenance costs low. They can be simply washed (maximum 3 Bars) or swept with a soft brush. You can also use our bactericidal cleaning product: Cleandalle FC. Allow 72 hours after sticking before cleaning for the first time. Never use a solvent to clean the components.

Green is more sensitive to UV rays than red. A special PU 63 or PA 63 non-slip paint can be applied by airless spraying by a specialist to renovate the appearance of HEXDALLE® TACTILE tiles that have faded with time.

## IX. STORAGE

Storage temperature between 15 and 25°C.

Avoid the tiles being partially exposed to UV rays.

Prior to laying, unpack the tiles onto a flat surface so that they recover their characteristics.

## X. PACKAGING

Depending on your needs: per unit or by pallets

PALLETS: disposable, 1,000 x 1,200mm.

PACKING: We take great care with packing to avoid any problem occurring during transport. In order to protect your rights and interests, we advise you to check the state of the goods upon taking delivery. The products are packed in a white stretch film and France Construction guarantee adhesive tape. The corners are protected by 4 cardboard pieces during transport and the goods are held in place by 2 plastic straps.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization. This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques  
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS  
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93  
WEBSITE: [www.hexdalle.com](http://www.hexdalle.com) - E-MAIL: [contact@hexdalle.com](mailto:contact@hexdalle.com)

## MAXIMUM PACKAGING PER PALLET:

For 25mm-thick tiles	67 sqm maximum per pallet
For 35mm-thick tiles	47 sqm maximum per pallet
For 45mm-thick tiles	37 sqm maximum per pallet
For 55mm-thick tiles	33 sqm maximum per pallet
For 65mm-thick tiles	26 sqm maximum per pallet
For 75mm-thick tiles	21 sqm maximum per pallet
For 90mm-thick tiles	18 sqm maximum per pallet

## XII. LAYING INSTRUCTIONS

Please check the laying instructions of our Hexdalle® rubber tiles.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.  
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques  
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS  
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93  
WEBSITE: [www.hexdalle.com](http://www.hexdalle.com) - E-MAIL: [contact@hexdalle.com](mailto:contact@hexdalle.com)