

PRODUCT DATA SHEET – HEXDALLE® XE BEVELLED EDGING

I. CHARACTERISTICS


Made of recycled black rubber aggregate which has been sorted and graded, bound by volume-dyed polyurethane elastomer resin.

II. COLOURS

Brick Red – Green – Black – Grey – Chocolate

III. APPEARANCE

Granular

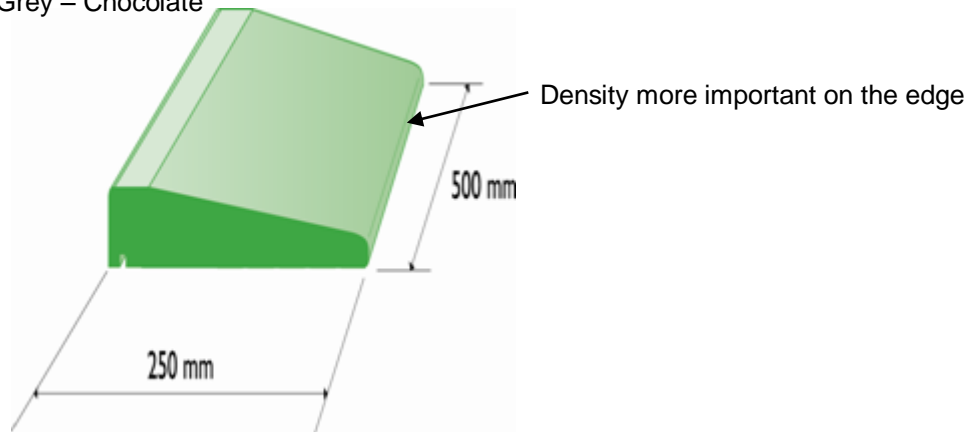

IV. DIMENSIONS

Thicknesses: 25 – 35 – 45 – 55 – 65 – 75 - 90mm.

Width: 250mm *Tolerance +/- 5%*

Length: 500mm *Tolerance +/- 5%*

V. USE

The bevelled edging is used to finish off the edge of the play area in order to avoid having a step. Bevelled edges are mandatory to belt Hexdalle® tiles.

VI. LAYING

The bevelled edging is laid on a stable, even surface (concrete, bitumen-coated material) that is clean, flat and dry. Refer to the HEXDALLE® tile laying instruction sheets.

The bevelled edging is stuck underneath using the PU 93 or PU32 polyurethane glue.

VII. PACKAGING

Sold individually. Two bevelled edging pieces = 1 linear metre laid side by side.

VIII. MAINTENANCE

The HEXDALLE® XE bevelled edging can be simply washed (maximum 3 Bars) or swept with a soft brush. You can also use our bactericidal cleaning product: Cleandalle FC. Allow 72 hours after sticking before cleaning for the first time. Never use a solvent to clean the tiles.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93
WEBSITE: www.hexdalle.com - E-MAIL: contact@hexdalle.com