

## PRODUCT DATA SHEET – HEXDALLE® XE CONNECTION EDGING

### I. CHARACTERISTICS


Made of recycled black rubber aggregate which has been sorted and graded, bound by volume-dyed polyurethane elastomer resin.

### II. COLOURS

Brick Red – Green – Black – Grey

### III. APPEARANCE

Granular

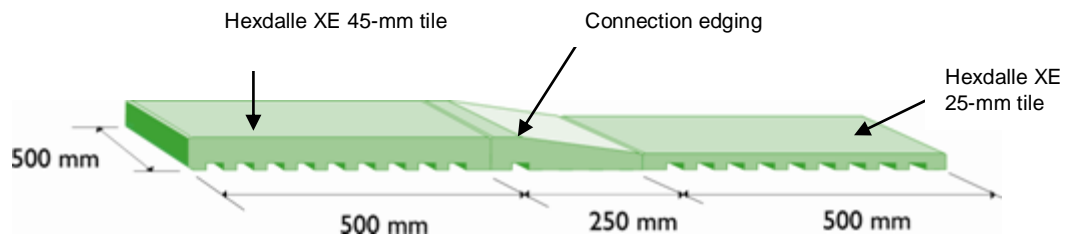

### IV. DIMENSIONS

Width: 250mm *Tolerance +/- 5%*

Length: 500mm *Tolerance +/- 5%*

Thicknesses: 25/45mm – 45/75 mm – 55/65mm – 65/75mm.

Ask us for other dimensions

### V. USE

The connection edging pieces are used to link areas of different thicknesses.

### VI. LAYING

The connection edging is laid on a stable, even surface (concrete, bitumen-coated material) that is clean, flat and dry. Refer to the HEXDALLE® tile laying instruction sheets.

The connection edging is stuck underneath using the PU 93, PU 32 or PU 59 polyurethane glue.

### VII. PACKAGING

Sold individually. Two connection edging pieces = 1 linear metre laid side by side.

### VIII. MAINTENANCE

The HEXDALLE® XE connection edging can be simply washed (maximum 3 Bars) or swept with a soft brush. You can also use our bactericidal cleaning product: Cleandalle FC. Allow 72 hours after sticking before cleaning for the first time. Never use a solvent to clean the tiles.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.  
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques  
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS  
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93  
WEBSITE: [www.hexdalle.com](http://www.hexdalle.com) - E-MAIL: [contact@hexdalle.com](mailto:contact@hexdalle.com)