

PRODUCT DATA SHEET – HEXDALLE® 90° ANGLE PROTECTION

I. CHARACTERISTICS

Made of black rubber aggregate bound by volume-dyed polyurethane elastomer resin.

II. COLOURS


Red – Green – Black – Grey – Chocolate – Black flecked with colour – or other colour (to be specified) in EPDM

III. APPEARANCE

Granular

IV. DIMENSIONS

Thickness: approx. 10mm
Length: 1.50m – Width: 70mm.
Weight: approx. 2.3kg

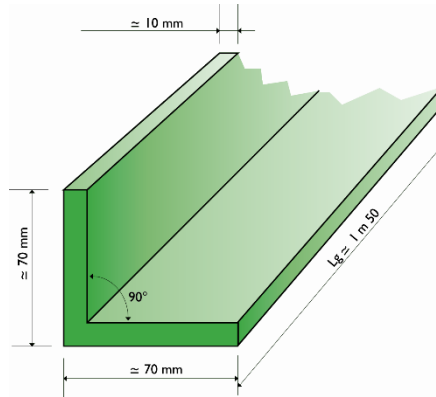

V. USE

HEXDALLE® ANGLE 90° : protection against impact or friction on sharp edges of walls or posts to reduce the risk of injury – For schools, day nurseries, sports facilities, retirement homes, factories, warehouses, fitness centres, car-parks, etc.

VI. LAYING

Coat both the fixed part and the HEXDALLE® 90° ANGLE protection with our HIGH TACK polyurethane glue in 310ml cartridges. One cartridge is sufficient to lay 2 90° ANGLE protections of 1.50m in length (manual gun for the cartridge not supplied).

VII. PACKAGING

Sold individually

VIII. MAINTENANCE

Use our Bactericidal cleaning product: Cleandalle FC

Green is more sensitive to UV rays than red.

A special PU 63 or PA 63 non-slip paint can be applied by airless spraying by a specialist to renovate the appearance of HEXDALLE 90° angle protections.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93
WEBSITE: www.hexdalle.com - E-MAIL: contact@hexdalle.com