

PRODUCT DATA SHEET – HEXDALLE® XE DALAMAT GS

I. CHARACTERISTICS

The tile is made of recycled black rubber aggregate which has been sorted and graded, bound by volume-dyed polyurethane elastomer resin. As a result of the composition, expansion in heat and shrinking in the cold are normal. Other processed chemical elements are used in the composition of our tiles to give them their solidity and elasticity.

The interlocking Dalamat rubber tile is a high quality economical safety floor. Dalamat can be assembled and dissembled very quickly with no particular tools.

The designs on the surface are similar to interlocking paving tiles.

II. COLOURS


Brick red – Green – Black – Chocolate or black speckled with yellow EPDM aggregate

During storage, make sure the elements are not partially exposed to UV rays as this will affect the colour. If the colour of the tiles is not exactly uniform, simply wait a few weeks for the colour to even out. A colour loss can occur without altering the characteristics of the tile. Green is more sensitive to UV rays than red. A special PU 63 or PA 63 non-slip paint can be applied by airless spraying by a specialist to renovate the appearance of the HEXDALLE® DALAMAT tile that has faded with time.

III. DIMENSIONS

Tiles of 795 x 795 mm.
(Tolerance +/- 0.5 % at 20 °C)

Thickness: 20 – 25 – 40 – 45 mm.
(Tolérance +/- 3 % à 20 °C)

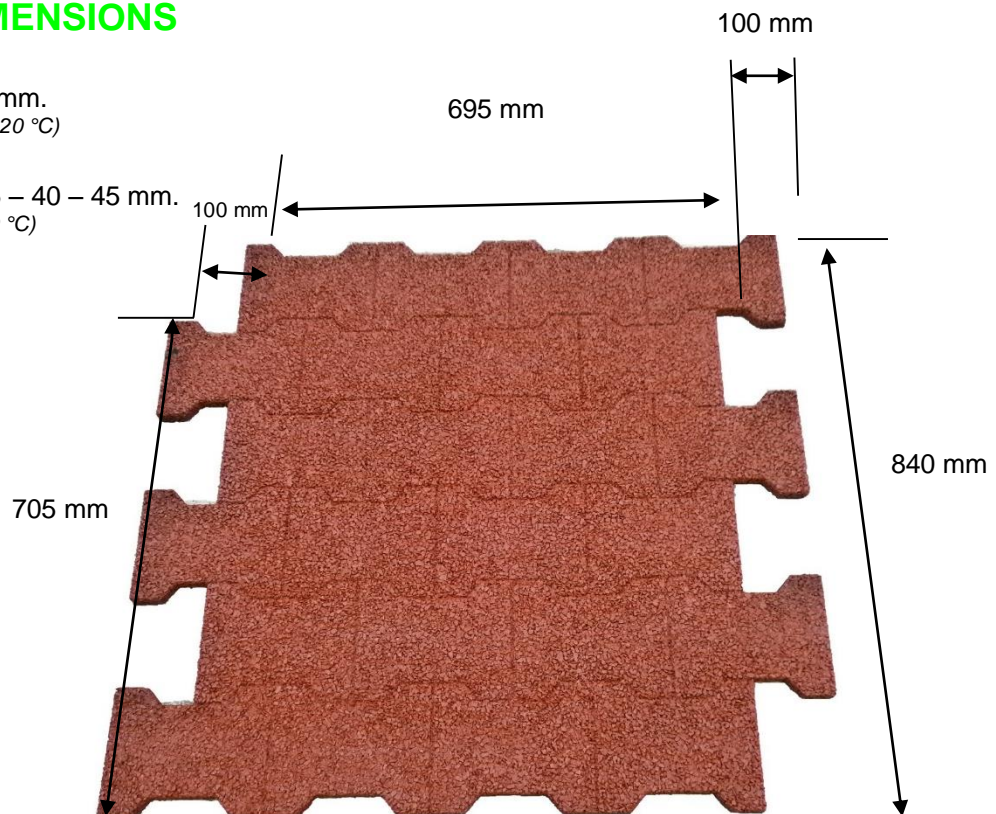

IV. USE

DALAMAT GS was designed to be covered with synthetic turf (sand or rubber aggregate-ballasted), or wet pour ground.

It is really adapted for permeable and waterproof grounds. DALAMAT GS is a sublayer for many uses: play areas in synthetic turf (playgrounds, multi-sport field, etc.)


Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93
WEBSITE: www.hexdalle.com - E-MAIL: contact@hexdalle.com

V. ADVANTAGES

You avoid undulations when you install DALAMAT GS as they are not delivered in rolls. Installation is easier thanks to the tile's reduced weight. Thanks to its composition, we have a high shock absorption.

DALAMAT GS is an inert non-degradable product but that you can recycle when at end of life. Dalamat GS has a high porous power both horizontally and vertically.

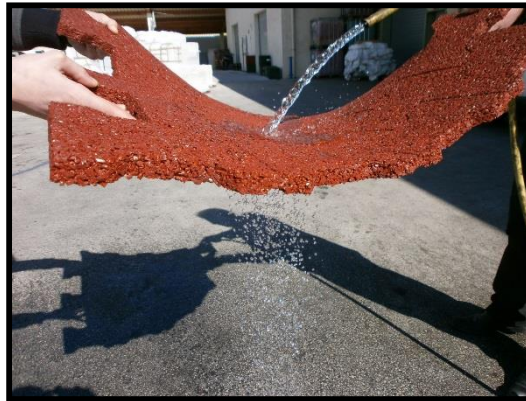

VI. STORAGE

Storage temperature between 15 and 25°C.
Avoid the tiles being partially exposed to UV rays.
Prior to laying, unpack the tiles onto a flat surface so that they recover their characteristics.

VII. PACKAGING

Depending on your needs: per unit or by pallets

PALLETS: disposable, 1,000 x 1,200mm.

PACKING: We take great care with packing to avoid any problem occurring during transport. In order to protect your rights and interests, we advise you to check the state of the goods upon taking delivery. The products are packed in a white stretch film and a France Construction guarantee adhesive tape. The corners are protected by 4 cardboard pieces during transport and the goods are held in place by 2 plastic straps.

PACKAGING:

For 20 mm-thick tiles	107 tiles maximum per pallet
For 30mm-thick tiles	69 tiles maximum per pallet
For 40mm-thick tiles	55 tiles maximum per pallet
For 55mm-thick tiles	39 tiles maximum per pallet

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93
WEBSITE: www.hexdalle.com - E-MAIL: contact@hexdalle.com