

Before gluing, unpack all the tiles onto a flat surface so that they recover their characteristics (tile decompression).

I. THE GROUND


The HEXDALLE® DALAMAT and DALAMAT GS tiles intended to be glued must be laid on a stable, even ground that is flat, clean and dry (concrete, bitumen-coated material) and a minimum slope of 1%. New toppings should have been poured for at least 28 days and should not be soiled (laitance, dust, oil, grease, etc.).

For any glazed surface such as tiled floor, metal plate, aluminium, wood; make a resistance test before laying the rubber tiles and after sanding the surface

The porosity of the DALAMAT GS allows to lay them on porous without any slope.

II. LAYOUTS

Thanks to their shape in puzzle, the assembling of DALAMAT and DALAMAT GS tiles is very easy. They have to be put in staggered rows, in order to link the tiles between themselves.

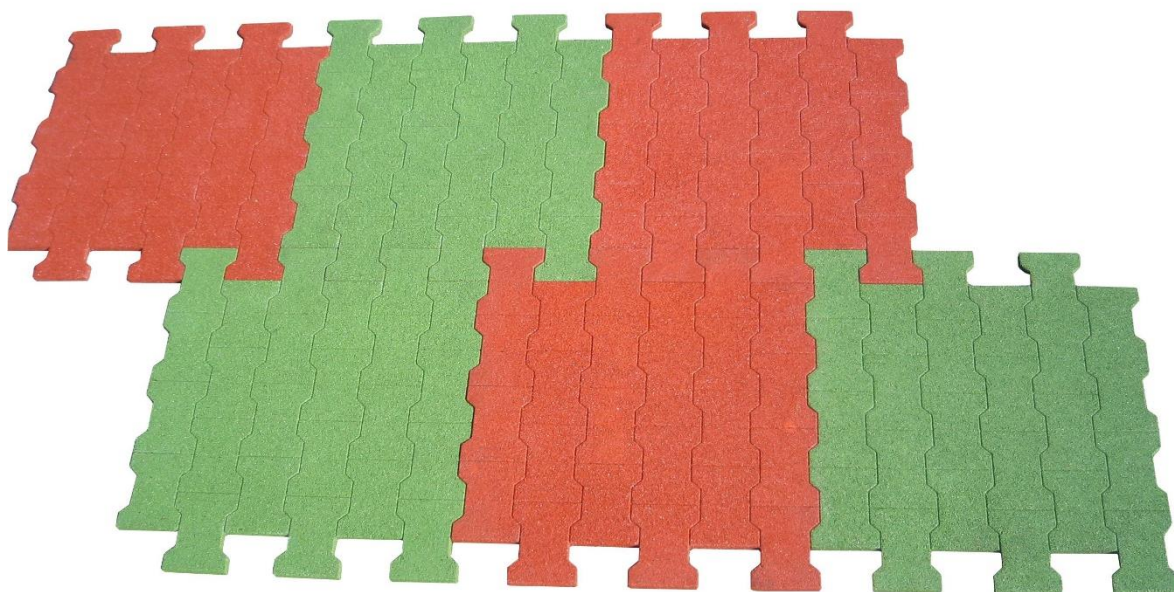

III. Laying

Always have a rag full of FC 41 to clean the excesses of glue. Do not forget safety goggles and gloves. PU59 liquid glue must be used for DALAMAT and is advised for DALAMAT GS (1kg / 50 sqm).

Put the glue from the top of the assembled tiles. Let the glue penetrate between the tiles with gravity.

Check the good link between each tile while progressing.

Complete dry in 48 h.

Caution: do not put too much glue because the glue will inflate and overflow on the tile.

Laying time: 120 to 150 sqm / day / person

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.
This manual was reviewed in August 2018 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93
WEBSITE: www.hexdalle.com - E-MAIL: contact@hexdalle.com