

# LAYING INSTRUCTION SHEET – HEXDALLE® SL INLAID ELEMENTS FOR WET FLOORS IN SITU

## I. THE FLOORING

### 1. CHARACTERISTICS

The HEXDALLE® SL elements are made of E.P.D.M. aggregate and polyurethane bonding agent (aromatic polyisocyanate). Due to the composition, light strongly affects the colour.

### 2. COLOURS


Red, green, black.  
Green or red with yellow flecks.  
Yellow with green or red flecks.

### 3. DIMENSIONS


Depending on the shapes, please refer to our table.  
Thickness = about 10mm.

### 4. LAYING

- Choose an area which is not subject to intensive use or a lot of friction due to the type of play equipment.  
For example: at the foot of a slide, roundabouts, etc.
- Clean the concrete, coated material or rubber surface.

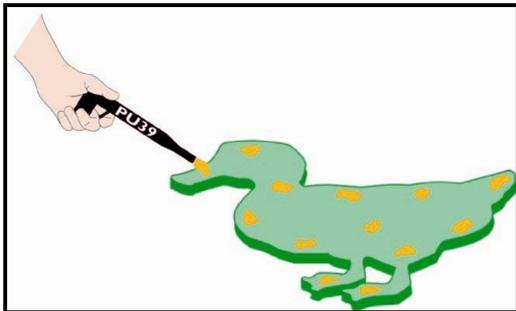



I) Apply dots of Polyurethane glue onto the HEXDALLE® SL element. The HIGH TACK glue is sold in 310-ml cartridges (use with a suitable gun, not supplied).

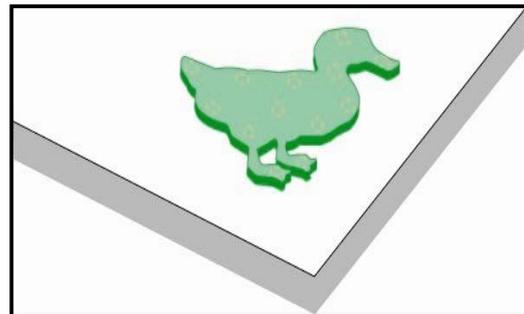


II) Turn the HEXDALLE® SL design over so that the dots of HIGH TACK glue come into contact with the ground. Lightly tap with a rubber mallet or a wooden bar. The HIGH TACK glue sticks instantly.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.  
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques  
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS  
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93  
WEBSITE: [www.hexdalle.com](http://www.hexdalle.com) - E-MAIL: [contact@hexdalle.com](mailto:contact@hexdalle.com)

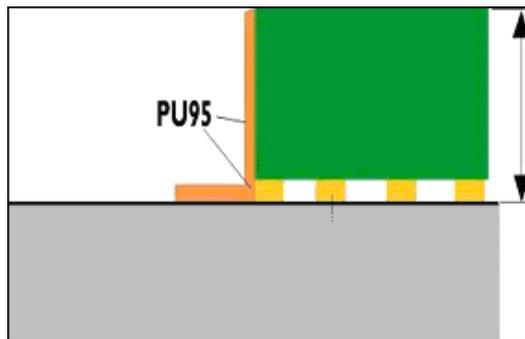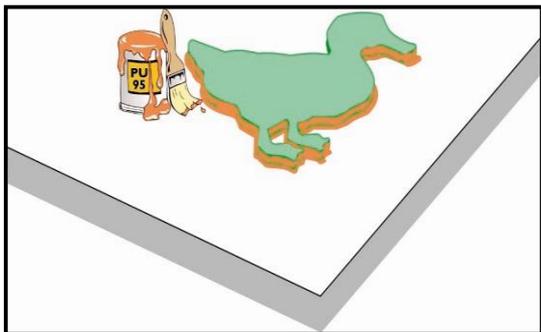

III) Using a brush, apply the polyurethane bonding agent that you use to make your wet floor onto the section of the figurine.

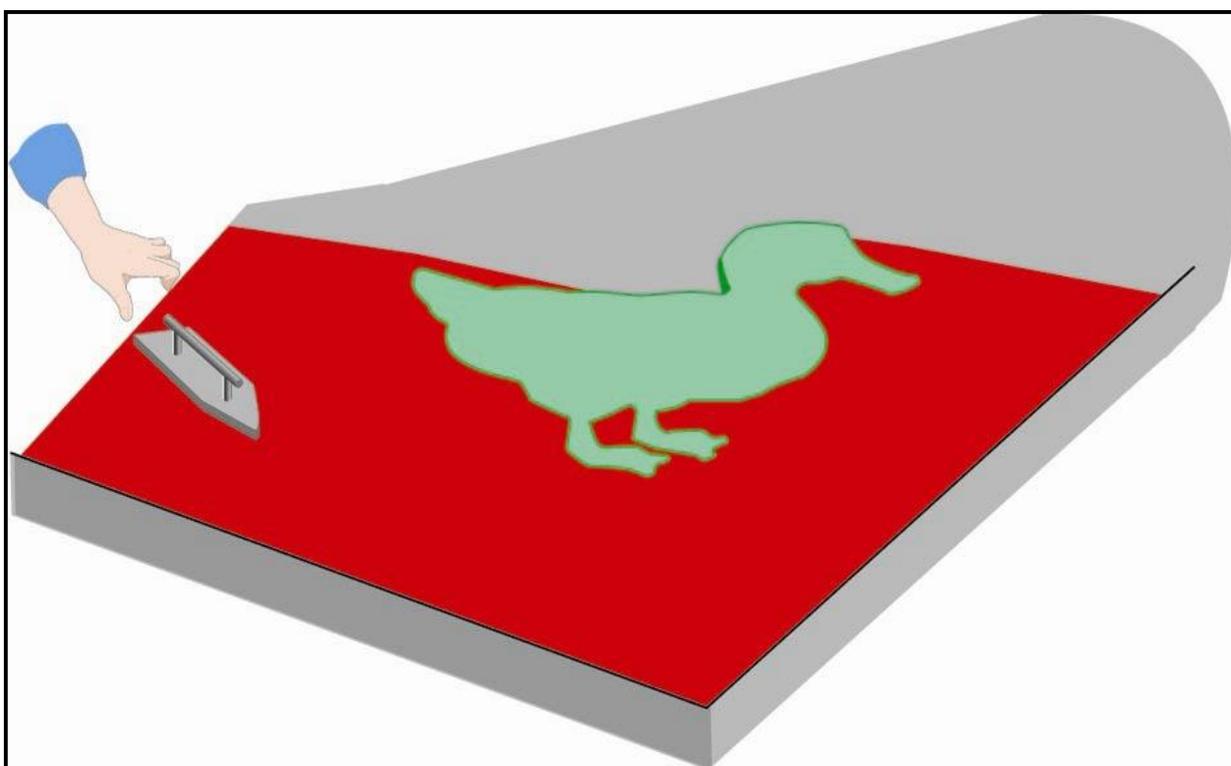

IV) Apply your wet floor against the HEXDALLE® SL figurine. Clean off any E.P.D.M. granules that may have got onto the figurine.

Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.  
 This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques  
 ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS  
 TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93  
 WEBSITE: [www.hexdalle.com](http://www.hexdalle.com) - E-MAIL: [contact@hexdalle.com](mailto:contact@hexdalle.com)

## II. HEXDALLE® SL INLAYS



Models, drawings and names are registered. No copy or reprography is permitted without prior written authorization.  
This manual was reviewed in February 2016 and may be updated; please make sure this is the latest version.

FRANCE CONSTRUCTION Sols Sportifs et Techniques  
ZAC des Bousquets – 165 rue de l'Initiative – F-83390 CUERS  
TEL.: +33 (0)4 94 14 91 91 – FAX.: +33 (0)4 94 14 93 93  
WEBSITE: [www.hexdalle.com](http://www.hexdalle.com) - E-MAIL: [contact@hexdalle.com](mailto:contact@hexdalle.com)  
Page 3 out of 3